

EQUINOX™

Soiling and Stain Resistant

Solution Dyed Fibre

Anti-microbial

BRE Certified

Impervious




Vibrant. Reliable. Timeless

danfloor
An Ulster Group Company

EQUINOX™

The Equinox range offers a modern selection of carpets that are subtle in design and vibrant in colour. Equinox is suitable for a number of locations and industry sectors due to its manufacturing process and innovative performance features, which include an impervious membrane and an anti-microbial yarn treatment.

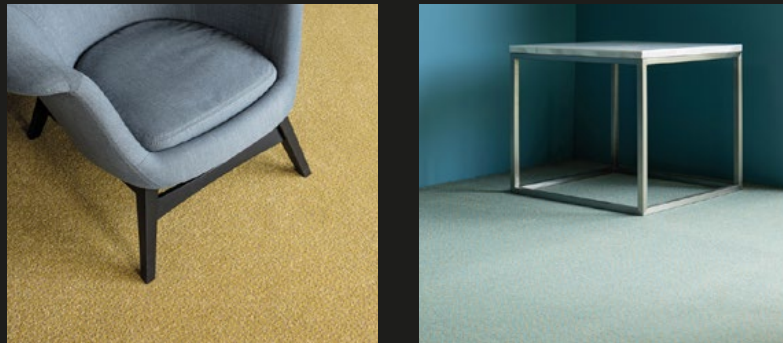

The finest carpet yarn

Carpet fibre determines the integrity of your carpet and influences many aspects such as surface structure, colour fastness, resilience to wear and effectiveness in soil and stain resistance.

danfloor's Prism™ fibre has a unique cross section which means the fibre is able to refract light; creating a carpet which can deliver purity in colour and defuse any visual soiling.

Prism™ is ideal for use within the healthcare and commercial markets and is a firm choice when selecting carpets for environments that are subject to regular soiling and commercial cleaning.

Key features of Prism™ include:

- Stain and soil resistance
- Inherently anti-static
- Resilience to wear
- Enhanced texture and colour
- Solution dyed yarn
- Colour fastness

Established Collection with a subtle design and varied colour palette



Design for dementia

danfloor have sort and gained product approval from the Dementia Services Development Centre (DSDC), an international centre which draws on 25 years of global research and practice. They have reviewed a number of our ranges and identified collections and colours which are deemed as suitable for use within dementia care environments and as having a positive effect on the quality of life for people living with dementia.

We are proud to say that all the colours within the Equinox Collection received approval from the DSDC gaining either a 1A, flooring which can be used indiscriminately, 1B, flooring that can generally be used throughout a property designed for those with dementia and 2, flooring has some pattern and can be used with caution. Below each colour within this sample book you will see the DSDC initials and a number alongside to show its approval rating.



Advanced Anti-microbial Technology

BI-OME® is an anti-microbial treatment applied to a number of our healthcare carpets. BI-OME® has been tested by L'Institut Pasteur de Lille and is a revolutionary technology which provides a permanent barrier against microbes.

BI-OME® is a non-leaching, permanent coating on the carpet fibres. The nano-coating is specially designed to deactivate microorganisms when they come into contact with the carpet fibres by physically stabbing the membrane of the microbe and electrocuting the biochemicals within it.

BI-OME® is important for anyone needing to either reduce odours or increase health protection. It is ideal for sectors where carpeting is used near or around food and drink, such as in the healthcare, education and hospitality sectors. BI-OME® remains functional even when subject to an intense cleaning and maintenance schedule.

The benefits of BI-OME® technology includes:

- Stops the growth of bacteria that causes MRSA and fungal growth which are the major causes of most fabric odour problems
- is not harmful to humans or the environment
- reduces the smells created by yeast, fungus and bacteria in carpet
- reduces the risk of cross contamination
- contains no arsenic, heavy metals, or polychlorinated phenols.

For further information on the benefits of the BI-OME® technology, please visit www.danfloor.co.uk/features/antimicrobial/



EQUINOX



3535 167
Willow

LRV: 22.10
DSCD: 1B



3535 154
Linen

LRV: 14.36
DSCD: 1B

EQUINOX



3535 117
Desert Storm

LRV: 14.53
DSCD: 1A



3535 152
Hessian

LRV: 12.77
DSCD: 1A




3535 030
Dakota Beige

LRV: 18.20
DSCD: 1B



3535 072
Dakota Grey

LRV: 12.67
DSCD: 1B

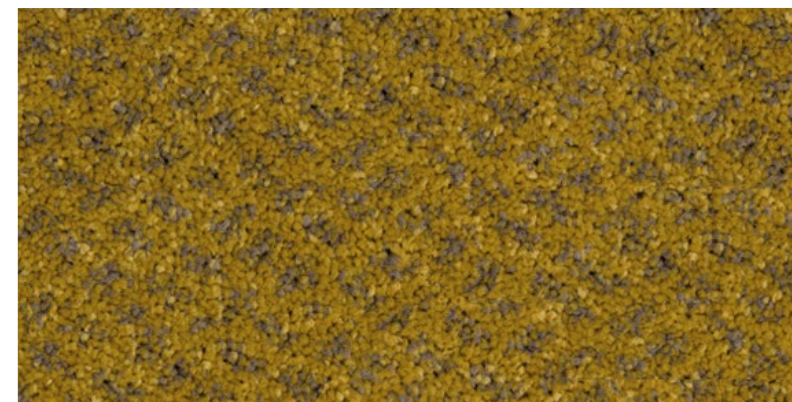

3535 245
Dijon

LRV: 19.86
DSCD: 1B



3535 247
Poupom

LRV: 19.59
DSCD: 1A



3535 243
Honey Mustard

LRV: 22.00
DSCD: 1A

EQUINOX




3535 174
French Blue

LRV: 25.06
DSCD: 1A



3535 184
Flax Blue

LRV: 15.34
DSCD: 1A

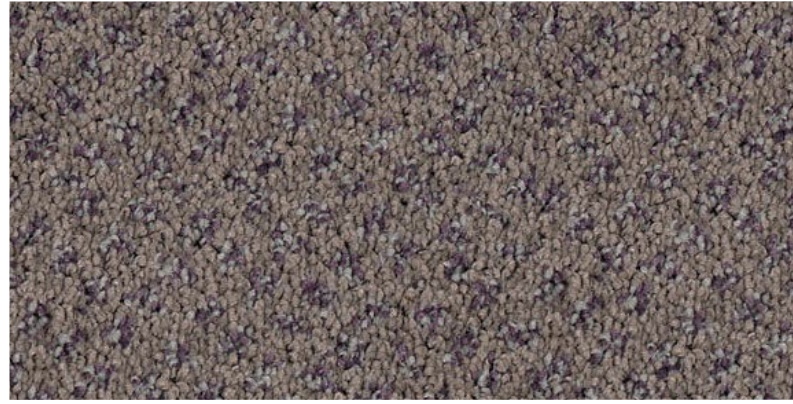

3535 171
Lavender

LRV: 17.72
DSCD: 1A



3535 177
Heather

LRV: 7.58
DSCD: 1B



3535 167
Willow

LRV: 22.10
DSCD: 1B



3535 166
Lichen

LRV: 16.58
DSCD: 1B



3535 154
Linen


LRV: 14.36
DSCD: 1B



3535 068
Turquoise


LRV: 11.13
DSCD: 1B

EQUINOX

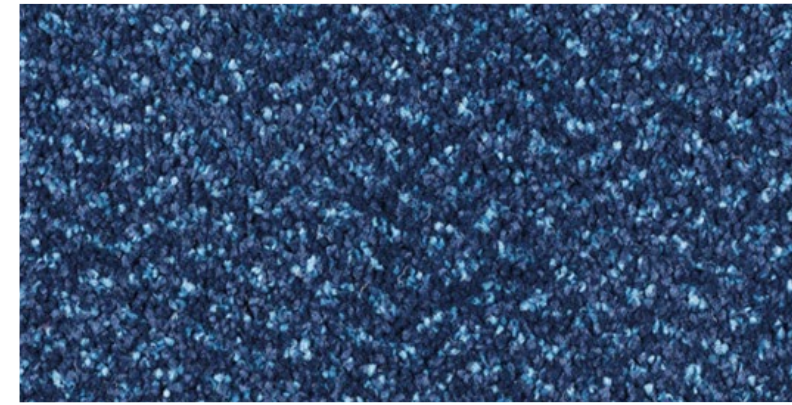


3535 082
Night Sky

LRV: 4.76
DSCD: 1B

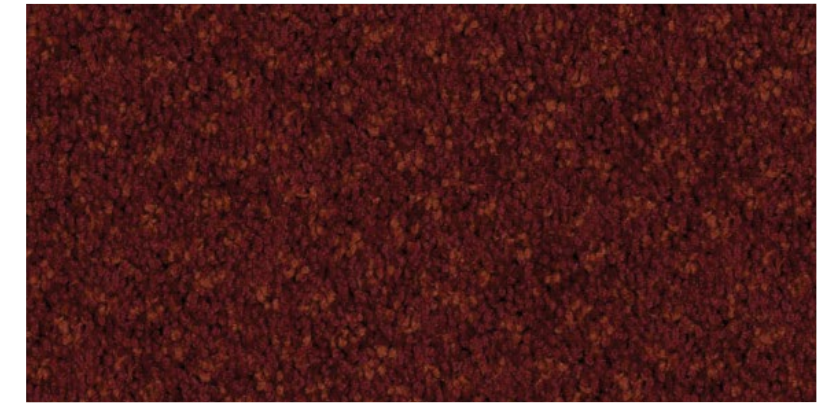


3535 196
Damson

LRV: 5.3
DSCD: 1B

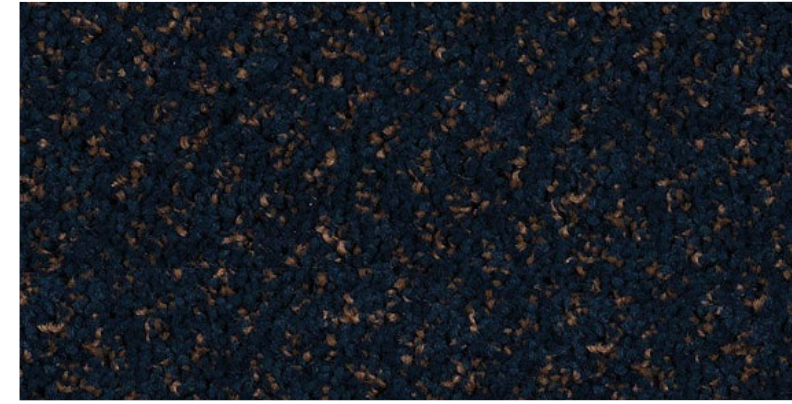


3535 186
Pearlised Blue

LRV: 8.53
DSCD: 1B

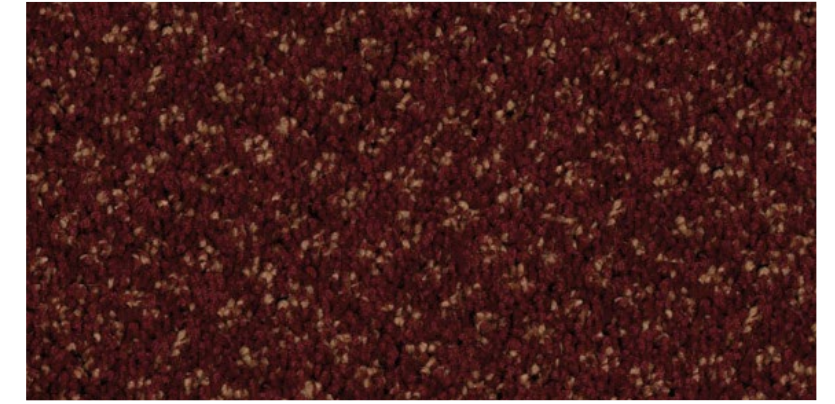

3535 190
Sunset Paradise

LRV: 6.4
DSCD: 2

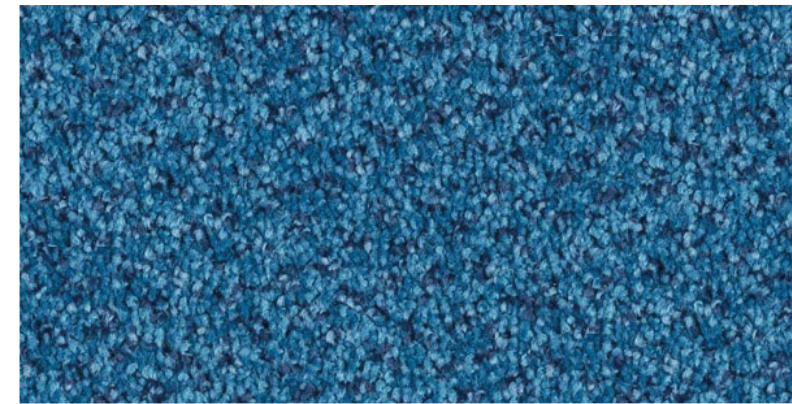

3535 080
Deep Lagoon

LRV: 9.57
DSCD: 1B




3535 155
Cajun Spice

LRV: 13.92
DSCD: 1B



3535 070
Black Ash

LRV: 10.67
DSCD: 1B

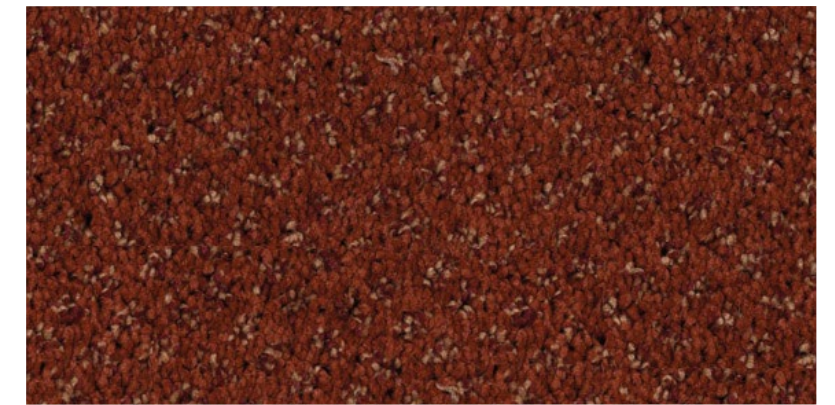

3535 144
Fired Earth

LRV: 8.06
DSCD: 1B

TECHNICAL SPECIFICATION	EQUINOX™	STANDARD
Design Pattern Identification	3535	
Method of Manufacture	Tufted Cut Pile	
Gauge	1/8" Gauge	
Measures	Rolls, approx. 400cm wide	
Surface	Cut Pile Heat Set	
Colouration	Solution Dyed	
Pile Material	Prism Fibre	
Primary Backing	Woven Polypropylene	
Total Weight	approx. 3100 g/m ²	
Pile Weight	approx. 1050 g/m ²	
Total Height	approx. 10 mm	
Pile Height	approx. 5.00 mm	
Tuft Density	approx. 154,350 Mt Sq	
Backing	Aqua Bac Impervious	
PERFORMANCE TEST		
Wear Classification	Class 32	EN 1307
Flammability / Hot Nut Test	Low Radius of Char - Pass	BS 4790
Burning Classification	Efl	EN 13501-1
Electrostatic Properties	1.5 kv @ 25% RH	BS ISO 6356
Thermal Resistance	1.51 Tog	BS 4745 (ISO 8302)
Reduction of Transmitted Impact Noise	29dB	BS EN ISO 140-8
Acoustics - Measurement of sound absorption in a reverberation room	Classification D	BS EN ISO 354:2003
Colour Fastness		
Light (1-8) Scale	Min 5	
Rub Fastness		
Water (1-5) Scale	Min 5	
Luxury Rating	LC3	EN ISO 1307
BRE Green Guide Rating	A to A+ (depending upon application)	Cert No. 511

Colour Selection

Although the Equinox range is designed to minimise visual soiling, it is strongly recommended that care be taken in choosing colours to suit particular locations. Medium to dark coloured carpets disguise soiling more effectively than plain, light shades and should therefore be considered for high traffic areas such as corridors.

Tolerances

Product specifications are derived from averages in yarn, fibre, temperature and colour which may vary within the standard industry tolerances. Performance is not affected by such variations.

Pressure Markings

Pressure marks result during the manufacturing of large rolls of carpet. These faint lines can also be a result of rolls resting in racks where they are subjected to considerable pressure. As a result unavoidable pressure lines are often visible when the carpet is first unrolled, but should not cause any concern. The lines will not affect performance and will disappear within a few weeks of normal use. Thorough and regular vacuuming can also assist with removing the lines.

Care & Maintenance

Carpet should be cleaned daily with a vacuum cleaner, preferably one with a beater action. Spillages should be taken up promptly and surface stains removed by an appropriate method as soon as possible. Instructions for the maintenance of carpets are available from danfloor upon request or can be downloaded from www.danfloor.co.uk. It is recommended that a maintenance schedule be initiated from the date of installation to achieve maximum life expectancy of the product. Chair pads are required under roller castor chairs to prevent accelerated wear and to preserve appearance retention.

Aqua Bac Impervious

Manufactured to conform to the latest standards in impermeability, Aqua Bac impervious by danfloor guarantees the customer protection against sub-floor contamination. Situated beneath the carpet substrate and above the latex foam backing the impervious membrane has been designed to allow sub-floor moisture evaporation via the latex foam backing whilst preventing surface liquid penetration.

Suitable for use with under floor heating systems the Aqua Bac backing acts as a non thermal insulator, reduces sound impact levels and provides a cost effective built in cushioned underlay.

Installation

Prior to cutting and installation all carpets should be unrolled and inspected to ensure all quality standards have been met. When installing impervious backed carpets we recommend that joins should be kept to a minimum and that no joins should be placed within the main body of a room or any location that could undermine the integrity or functionality of an impervious backed carpet. Prior to installation approval should be sought with the client as to the location of all joins. Installation must be carried out by an approved carpet installer in accordance to BS5325:2001. A full Installation Guide, including recommended adhesives, can be downloaded from www.danfloor.co.uk



danfloor
An Ulster Group Company

danfloor Uk Ltd
106 Longmead Road, Emerald Park, Emersons Green
Bristol BS16 7FG, United Kingdom
T: 0333 014 3132, F: 0333 014 3134
E: info@danfloor.co.uk

Danfloor Denmark
danfloor a/s, Østerbro 9, DK-6933 Kibæk
T: +45 9699 1900, F: +45 9699 1999

Innovative Carpet Solutions

www.danfloor.co.uk